ATTORNEY'S DOCKET NUMBER
JC18 Rec'd PCT/PTO 0 3 MAY 2001

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR
09/831014

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/DE99/03481	**02 November 1999**	**03 November 1998**

TITLE OF INVENTION
COMMUNICATIONS SYSTEM WITH COMMUNICATION TERMINALS WHICH ARE CONNECTED TO A SWITCHING SYSTEM VIA A PACKET-ORIENTED COMMUNICATION NETWORK

APPLICANT(S) FOR DO/EO/US
Josef Wahler

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.

2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.

3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).

4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.

5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))

     a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).

     b. ☐ has been transmitted by the International Bureau.

     c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).

6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).

7. ☒ A copy of the International Search Report (PCT/ISA/210).

8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))

     a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau).

     b. ☐ have been transmitted by the International Bureau.

     c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.

     d. ☐ have not been made and will not be made.

9. ☒ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).

10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).

11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).

12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.

14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.

15. ☒ A **FIRST** preliminary amendment.

16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.

17. ☒ A substitute specification.

18. ☐ A change of power of attorney and/or address letter.

19. ☒ Certificate of Mailing by Express Mail

20. ☒ Other items or information:

Submission of Drawings Figures 1-4 on four sheets

21.   The following fees are submitted:.

CALCULATIONS   PTO USE ONLY

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2) paid to USPTO and International Search Report not prepared by the EPO or JPO **$1,000.00**

☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but Internation Search Report prepared by the EPO or JPO **$860.00**

☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **$710.00**

☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **$690.00**

☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **$100.00**

JC18 Rec'd PCT/PTO   **0 3 MAY 2001**

ENTER APPROPRIATE BASIC FEE AMOUNT =

$860.00

Surcharge of **$130.00** for furnishing the oath or declaration later than ☐ 20   ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).   **$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	9 - 20 =	0	x $18.00	$0.00
Independent claims	1 - 3 =	0	x $80.00	$0.00
Multiple Dependent Claims **(check if applicable)**.			☐	$0.00

TOTAL OF ABOVE CALCULATIONS   =

$860.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) **(check if applicable)**.   ☐   **$0.00**

SUBTOTAL   =

$860.00

Processing fee of **$130.00** for furnishing the English translation later than ☐ 20   ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).   +   **$0.00**

TOTAL NATIONAL FEE   =

$860.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) **(check if applicable)**.   ☐   **$0.00**

TOTAL FEES ENCLOSED   =

$860.00

Amount to be: refunded	$
charged	$

☒   A check in the amount of **$860.00**   to cover the above fees is enclosed.

☐   Please charge my Deposit Account No.   in the amount of   to cover the above fees.
     A duplicate copy of this sheet is enclosed.

☒   The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment
     to Deposit Account No.   **02-1818**   A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

William E. Vaughan
Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, IL 60690-1135

SIGNATURE

William E. Vaughan
NAME

39,056
REGISTRATION NUMBER

May 3, 2001
DATE

BOX PCT

IN THE UNITED STATES ELECTED/DESIGNATED OFFICE

OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

PRELIMINARY AMENDMENT

APPLICANT:	Josef Wahler	DOCKET NO: 112740-202
SERIAL NO:		GROUP ART UNIT:
		EXAMINER:

10 INTERNATIONAL APPLICATION NO: PCT/DE99/03481

INTERNATIONAL FILING DATE: 02 November 1999

INVENTION: COMMUNICATIONS SYSTEM WITH COMMUNICATION
TERMINALS WHICH ARE CONNECTED TO A
SWITCHING SYSTEM VIA A PACKET-ORIENTED
15 COMMUNICATION NETWORK

Assistant Commissioner for Patents,
Washington, D.C. 20231

20 Sir:

Please amend the above-identified International Application before entry

into the National stage before the U.S. Patent and Trademark Office under 35 U.S.C.

§371 as follows:

In the Specification:

25 Please replace the Specification of the present application, including the

Abstract, with the following Substitute Specification:

SPECIFICATION

TITLE

COMMUNICATIONS SYSTEM WITH COMMUNICATION

TERMINALS WHICH ARE CONNECTED TO A SWITCHING SYSTEM

VIA A PACKET-ORIENTED COMMUNICATION NETWORK

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates, generally, to a communications system with communication terminals connected to a switching system via a packet-oriented communication network and, more particularly, to a communications system wherein a switching system is connected to a communication network via a

5   broadband access unit which has a network access interface, and communication terminals are connected to the communication network via hubs.

Description of the Prior Art

Both from German Laid-Open Specification DE 196 04 244 A1, and from Schlichthärle D.: "Hybrid ATM/ISDN Subscriber Connection to a Broadband

10   ISPBX", Internal Conference on Computer Communication - Proceedings of the Conference - Towards a New World in Computer Communication, 28 September 1992, XP000671919, a communications system is known in which the communication terminals allocated to a switching system are connected to the switching system via an ATM-based communication network. In this

15   arrangement, subscriber interfaces for connecting communication terminals are provided by a number of ATM transfer units - frequently called ATM <u>hubs</u> - which are connected to the ATM-based connection network. The switching system and the ATM hub in each case have an ATM access unit via which, on the one hand, a connection to the ATM-based communication network is

20   implemented and, on the other hand, a bi-directional conversion between the internal data format of the switching system or hub and the data format of the ATM-based communication network is effected.

Modern ATM hubs usually have 64 subscriber interfaces for connecting communication terminals to an ATM-based communication network. In

25   particular, ISDN (Integrated Services Digital Network) communication terminals are connected via S_0 interfaces, or digital communication terminals are connected via interfaces derived therefrom such as, for example, U_{P0} interfaces, via an ATM hub to an ATM-based communication network. In general, a U_{P0} or an S_0 interface includes, on the one hand, two user data channels which, as ISDN-oriented B

channels have a transmission rate of in each case 64 kBit/s and, on the other hand, a signalling channel which, as ISDN-oriented D channel, has a transmission rate of 16 kBit/s.

The switching system and the ATM hubs are frequently connected to an ATM-based communication network via a so-called STM1 (Synchronous Transfer Mode) interface having a maximum transmission bit rate of 155 Mbit/s. An access module providing such an STM1 interface is used in communications systems from the company Siemens AG under the internal name "STMA access module". In the text which follows, this name is used for such access modules having an STM1 interface.

An STMA access module arranged in the switching system currently provides the capability to support 32 subscriber interfaces of an ATM hub connected to an ATM-based communication network; i.e., it is possible to carry out data transmission between the STMA access module and 32 different communication terminals connected to an ATM hub. This only corresponds to a maximum transmission bit rate of 8 Mbit/s via the STM1 interface provided by the STMA access module (having a maximum transmission bit rate of 155 Mbit/s).

Thus, two STMA access modules are necessary in the switching system for supporting all 64 subscriber interfaces of an ATM hub, which is connected via an ATM-based communication network, with the switching system. Since both the STMA access modules and the ATM access unit of an ATM hub only have one STM1 interface in each case, it is necessary to interpose an additional ATM switching module. The ATM switching module concentrates the data to be transmitted between the switching system and the ATM hub from the two STMA access modules onto the ATM access unit of the ATM hub or, respectively, splits these data from the ATM access unit onto the two STMA access modules.

Using an enhanced STMA access module which supports a total of 64 subscriber interfaces there is no need to interpose an additional switching module since an STMA access module expanded in this manner supports all 64 subscriber interfaces of an ATM hub and, thus, these can be connected directly to the enhanced STMA access module. Thus, although only one STM1 interface, provided by an enhanced STMA access module, of the switching system is now occupied for each ATM hub connected to the ATM-based communication network, still only a maximum transmission bit rate of 16 Mbit/s is achieved via the STM1 interface (which has a maximum transmission bit rate of 155 Mbit/s).

It is an object of the present invention, therefore to specify an arrangement by which, when a number of ATM hubs are connected to a packet-oriented communication network, a data transmission can take place between a switching system and the ATM hubs via a network access of the switching system utilizing the transmission bandwidth provided by the network access.

SUMMARY OF THE INVENTION

In connection with the present invention, and to provide a better understanding of the basic configuration of a switching system, is helpful first to discuss again in greater detail principles which are already known.

In this connection, Figure 1, which shows a diagrammatic representation of the essential functional units of a switching system PBX, serves to obtain a quicker understanding of the relationships. The switching system PBX has a central controller CC which can be connected to access modules and a switching network SN. The access modules include, in particular, subscriber line modules SLM11...SLM1x, SLM21...SLM2x, SLMn1...SLMnx and so-called trunk modules TM11, TM21, TMn1.

The subscriber line modules SLM have subscriber interfaces for connecting communication terminals KE to the switching system PBX. First, for example, ISDN communication terminals can be connected via S_0 interfaces or digital communication terminals can be connected via interfaces derived

-4-

therefrom, such as, for example, U_{p0} interfaces, to the switching system PBX. Furthermore, it is possible to connect analogue communication terminals and facsimile terminals to the switching system PBX via analogue a/b interfaces.

The trunk modules TM11, TM21, TMn1 are used for connecting the switching system PBX to communication networks or for connecting to other switching systems. A connection to another switching system is carried out, for example, via so-called "PCM Highways" (Pulse Code Modulation), frequently also called primary multiplex access or S_{2M} interface in the literature, which generally include, on the one hand, 30 user data channels which are designed as ISDN-oriented B channels with a transmission rate of 64 kBit/s and, on the other hand, a signalling channel which is designed as ISDN-oriented D channel with a transmission rate of 64 kBit/s. A data transmission via such a "PCM highway" thus results in a maximum transmission bit rate of 2 Mbit/s. A known trunk module TM11, TM21, TMn1 for connecting a switching system PBX to an ATM-based communication network is, e.g., the "STMA access module" by the Siemens company mentioned in the introduction to the description.

A number of peripheral modules - subscriber line modules SLM11...SLM1x, SLM21...SLM2x, SLMn1...SLMnx and trunk modules TM11, TM21, TMn1 can be functionally combined to form a line trunk unit LTU1,...,LTUn. Each line trunk unit LTU1,...LTUn is associated with a line trunk unit controller LTUC1,...,LTUCn which are in each case connected to the switching network SN and the central controller CC via a so-called LTU link having a transmission bandwidth of 4 x 4 Mbit/s. The message exchange between the peripheral modules and the central controller CC takes place via a signalling channel which is called by the reference symbol HDLC (High Level Data Link Control) Figure 1, in the known HDLC point-to-multipoint method.

The line trunk units LTU1,...,LTUn are also associated with a so-called signalling unit SU. This signalling unit SU supplies communication terminals KE

connected to the switching system PBX with audible tones and possibly with announcements stored in the signalling unit SU.

The central controller CC handles, among other things, the switching-related processing occurring with a communication link between communication terminals KE such as, e.g., the setting-up and clearing-down of the communication link. The central controller CC essentially includes a central processor DP, a processor for controlling the signalling DCL, a clock generator PCG and a database DB.

An essential advantage of the system according to the present invention then consists in that a broadband access unit according to the invention for connecting the switching system to the packet-oriented communication network can be implemented in a simple manner in switching systems already existing, instead of a conventional line trunk unit, without having to make any changes in the central controller of the switching system.

An advantage of further embodiments of the present invention consists in, among other things, that due to the modular configuration of the broadband access unit, which can be equipped both with broadband access modules and with narrowband access modules, the broadband access unit can be adapted in a simple manner to the current demand for broadband or narrowband subscriber accesses or network accesses.

Thus, the broadband access unit can be operated as a separate broadband switching system if it is exclusively equipped with broadband access modules and both as a broadband switching system and, in co-operation with the other components of the switching system, as a narrowband switching system if it is additionally equipped with narrowband access modules.

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Preferred Embodiments and the Drawings.

DESCRIPTION OF THE DRAWINGS

-6-

Figure 1 shows a diagram of the functional units of a known switching system;

Figure 2 shows a structural diagram for the diagrammatic representation of communication terminals connected to a switching system via a packet-oriented communication network;

Figure 3 shows a structural diagram for the diagrammatic representation of the essential functional units of a broadband access unit arranged in the switching system; and

Figure 4 shows a structural diagram for the diagrammatic representation of the essential functional units of a switching and control unit of the broadband access unit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 2 shows a diagrammatic representation of a switching system PBX with a broadband access unit BB-AE arranged instead of a conventional line trunk unit in the switching system PBX. The broadband access unit BB-AE is connected via at least one LTU (Line Trunk Unit) links LTU-VL with a central unit ZE, containing a switching network SN and a central controller CC, of the switching system PBX. A data transmission between the broadband access unit BB-AE and a central unit ZE via the LTU link LTU-VL is effected in accordance with a time-division multiplex-oriented data format and a data transmission with a maximum transmission bit rate of 4 x 4 = 16 Mbit/s is possible via an LTU link LTU-VL.

In addition, other line trunk units LTU1,...,LTUn-1, designed as described in connection with Figure 1, are arranged in the switching system PBX, the line trunk units LTU1,..., LTUn-1 being connected to the central unit ZE of the switching system PBX via, in each case, one LTU link LTU-VL. The line trunk units LTU1,..., LTUn-1 connect communication terminals to the switching system PBX via subscriber interfaces or, respectively, implement a connection to a communication network or to another switching system. For example,

communication terminals KE are connected to the link trunk units LTU1,...LTUn-1. The broadband access unit BB-AE is connected via a so-called STM1 (Synchronous Transfer Mode) interface, having a maximum transmission bit rate of 155 Mbit/s, to an ATM-based (Asynchronous Transfer Mode)

5 communication network ATM-KN. Furthermore, the broadband access unit BB-AE has other interfaces for connecting communication terminals or networks to the broadband access unit BB-AE. For example, a UTP25 interface (Unshielded Twisted Pair) having a maximum transmission bit rate of 25 Mbit/s and an Ethernet interface ES for connection to a computer network based on the

10 IP (Internet Protocol) is shown.

Furthermore, so-called ATM transfer units ATM-HUB - frequently called "ATM hubs" in the literature - are connected to the ATM-based communication network ATM-KN. In this arrangement, the ATM hubs ATM-HUB are connected to the ATM-based communication network ATM-KN in each case via an access

15 unit AE having an STM1 interface. The ATM hubs ATM-HUB additionally have subscriber interfaces TSS1, ..., TSS64 for connecting communication terminals to the ATM-oriented communication network ATM-KN. As an example, communication terminals KE1,..., KEn are shown which are connected to the ATM hubs ATM-HUB via the subscriber interfaces TSS1, ..., TSS64. In

20 particular, ISDN (Integrated Services Digital Network) communication terminals are connected via S_0 interfaces, or digital communication terminals are connected via interfaces derived therefrom, such as, for example, U_{p0} interfaces, via the ATM hubs to the ATM-based communication network ATM-KN. In addition, there is the possibility of connecting analogue communication terminals to the

25 ATM-oriented communication network ATM-KN via analogue a/b interfaces. Data transmission between communication terminals KE1, ..., KEn and the switching system PBX is usually carried out on the basis of the time-division multiplex-oriented data format. For transmitting data between the communication terminals KE1, ..., KEn and the switching system PBX via the ATM-based

-8-

communication network ATM-KN, a bi-directional conversion is performed between the time-division multiplex-oriented data format and the data format of the ATM-oriented communication network ATM-KN by the access units AE of the ATM hubs ATM-HUB and the broadband access unit BB-AE.

5   Figure 3 shows a diagrammatic representation of the essential functional units of the broadband access unit BB-AE. The broadband access unit BB-AE has both a broadband bus system BB-BUS and a narrowband bus system NB-BUS for transmitting data within the access unit. In the broadband access unit BB-AE, a line trunk unit controller LTUCX is arranged which is connected both to the

10   narrowband bus system NB-BUS and, via at least one LTU link LTU-VL, to the central unit ZE of the switching system PBX. The line trunk unit controller LTUCX performs a bi-directional conversion between the data format of the LTU link LTU-VL, an LTU link LTU-VL including four time-division multiplex-oriented 4-Mbit/s communication links, and the data format of the

15   narrowband bus system NB-BUS which includes a number of time-division multiplex-oriented 2-Mbit/s communication links.

To convert the time-division multiplex-oriented data format in the access units - corresponding to the data format set up for data transmission via the narrowband bus system NB-BUS - to the data format of the ATM-based

20   communication network ATM-KN, the broadband access unit BB-AE has conversion units STMAX. The conversion units STMAX are connected, on the one hand, via the narrowband bus system NB-BUS, in each case via eight time-division multiplex-oriented 2-Mbit/s data communication links, to the line trunk unit controller LTUCX and, on the other hand, via a UTOPIA (Universal

25   Test and Operation PHY Interface for ATM) interface to the broadband bus system BB-BUS.

A bi-directional data transfer between the link trunk unit controller LTUCX and a conversion unit STMAX is possible with a maximum transmission bit rate of 16 Mbit/s via the eight time-division multiplex-oriented 2-Mbit/s

communication links. With the present time-division multiplex-oriented data format, this corresponds to a number of 256 multiplex channels as a result of which a total of 64 subscriber interfaces can be supported by a conversion unit STMAX.

5   The broadband bus system BB-BUS is connected to broadband access modules for connecting communication terminals or computers, or for connecting the switching system PBX to a communication or computer network. As an example, an STM1 access module is shown via which, for example, the switching system PBX is connected to the ATM-based communication network ATM-KN.

10   Furthermore, a UTP25 access module having a maximum transmission bit rate of 25 Mbit/s for connecting computers and an Ethernet interface ES for connecting the switching system PBX to a computer network based on the Internet protocol is shown. As an alternative, narrowband access modules also can be connected to the narrowband bus system NB-BUS instead of the broadband access modules

15   STM1, UTP25, ES.

The access modules STM1, UTP25, ES are connected to a switching and control unit CSCP (Cell Switched Central Processor) via the broadband bus system BB-BUS and a CPU (Central Processing Unit) bus system CPU-BUS. Overall, a total of eight modules (ES, STM1, UTP25, CSCP, LTUCX, STMAX)

20   can be connected to the broadband bus system BB-BUS and to the narrowband bus system NB-BUS of the broadband access unit BB-AE.

Figure 4 shows a diagrammatic representation of the essential functional units of the switching and control unit CSCP. For cell-based data switching by the broadband access unit BB-AE, the switching and control unit CSCP essentially

25   has a cell-based switching matrix module BB-KN and a control unit CPU. The switching and control unit CSCP also includes 4 multiplexers MUX1, ..., MUX4 for connecting the cell-based switching matrix module BB-KN to the broadband bus system BB-BUS and other STM1 access units STM1 for connecting the switching and control unit CSCP directly to the ATM-based communication

-10-

network ATM-KN or to another communication or computer network. For controlling a data transmission, the control unit CPU is connected to the cell-based switching matrix module BB-KN, to a clock generator CLK and the STM1 access units STM1 via the CPU bus system CPU-BUS. To provide the

5   switching and control unit CSCP with a uniform clock supply, the clock generator CLK is connected to the multiplexers MUX1,..., MUX4, the cell-based switching matrix module BB-KN and the STM1 access units STM1.

The cell-based switching matrix module BB-KN has a switching-matrix-module-oriented memory unit SPE subdivided into two

10   submemories. In the first submemory of the switching-matrix-module-oriented memory unit SPE, a switching table HTT - frequently called "Header Translation Table" in the literature - is stored. This header translation table HTT contains the necessary switching information stored in the form of a pair of values consisting of a so-called input VCI (Virtual Channel Identifier) value and a so-called output

15   VCI value for switching ATM cells, via which information an ATM cell arriving at the cell-based switching matrix module BB-KN is switched. The second submemory of the switching-matrix-module-oriented memory unit SPE is used for temporarily storing the user data transmitted in a payload area of an ATM cell during the switching of the ATM cell in the cell-based switching matrix module

20   BB-KN.

Furthermore, the cell-based switching matrix module BB-KN has two high-frequency UTOPIA interfaces. The cell-based switching matrix module BB-KN is connected via the UTOPIA interfaces to, in each case, two multiplexers MUX1, ..., MUX4 via in each case one 16-bit-wide cell-based UTOPIA databus

25   DB. A bi-directional data transmission rate of 622 Mbit/s can be achieved via the 16-bit-wide cell-based UTOPIA databus DB. The multiplexers MUX1, ..., MUX4, which are designed, for example, as described in the German Patent application having the official reference 197 515 60.6, convert the data format of the 16-bit-wide cell-based UTOPIA databus DB to the data format of the

8-bit-wide broadband bus system BB-BUS. The multiplexers MUX1, ..., MUX4 can be connected in each case to a maximum of four 8-bit-wide databuses via which a maximum bidirectional data transmission rate of 310 Mbit/s can be achieved.

5   The multiplexers MUX1, ..., MUX4 are, thus, connected to broadband access modules STM1, UTP25, ES or to conversion units STMAX either via the broadband bus system BB-BUS or directly to the STM1 access units (shown, for example, for the multiplexer MUX4 in Figure 4) arranged in the switching and control unit CSCP via an 8-bit-wide UTOPIA databus.

10   In the text which follows, explanation is provided for the interaction of the functional units essential to data transmission between two communication terminals in greater detail with reference to Figures 1 and 2.

For data transmission starting from a first communication terminal KE connected to the ATM-based communication network ATM-KN via a subscriber

15   interface TSS1, ..., TSS64 of an ATM hub ATM-HUB, to a second communication terminal KE connected via a subscriber interface of a line trunk unit LTU1, ..., LTUn-1 of the switching system PBX, the time-division multiplex-oriented data format usually provided for a data transmission between the first communication terminal KE and the second communication terminal KE

20   is converted to the data format of the ATM-based communication network ATM-KN in the access unit AE of the ATM hub ATM-HUB associated with the first communication terminal KE. In this process, a bi-directional conversion between the time-division multiplex-oriented data format and the data format of the ATM-based communication network ATM-KN can be effected, for example,

25   in accordance with the two conversion methods proposed in the German Patent application having the file reference 198 436 25.4.

The converted data transmitted via the ATM-based communication network ATM-KN and received by the STM1 access module STM1 of the broadband access unit BB-AE, via which the switching system PBX has been

connected to the ATM-based communication network ATM-KN, are transmitted to a conversion unit STMAX allocated to the ATM hub ATM-HUB via the broadband bus system BB-BUS of the broadband access unit BB-AE. The conversion unit STMAX converts the received converted data back into the

5   time-division multiplex-oriented data format in accordance with the conversion method used in the access unit AE of the ATM hub ATM-HUB allocated to the first communication terminal KE. The data to be transmitted is then transmitted via the narrowband bus system NB-BUS to the line trunk unit controller LTUCX which adapts the data to be transmitted for a transmission via the line trunk unit

10   link LTU-VL (within the access unit, the data is transmitted via time-division multiplex-oriented 2-Mbit/s communication links; data is transmitted via the LTU link LTU-VL via time-division multiplex-oriented 4-Mbit/s communication links), and then forwards it to the central unit ZE of the switching system PBX via the LTU link LTU-VL. In the central unit ZE, the data to be transmitted is

15   switched to the line trunk unit LTU1, ..., LTUn-1 allocated to the second communication terminal KE by the switching network SN of the switching system PBX, which line trunk unit forwards the data to the second communication terminal KE.

A data transmission starting from the second communication terminal KE

20   to the first communication terminal KE analogously takes place in the reverse direction.

For a data transmission starting from the first communication terminal KE to a third communication terminal KE also connected to the ATM-based communication network ATM-KN via a subscriber interface TSS1, ..., TSS64 of

25   an ATM hub ATM-HUB, the time-division multiplex-oriented data format usually provided for a data transmission between the first communication terminal KE and the third communication terminal KE is converted to the data format of the ATM-based communication network ATM-KN in the access unit AE of the ATM hub ATM-HUB allocated to the first communication terminal KE.

-13-

The converted data transmitted via the ATM-based communication network ATM-KN and received by the STM1 access module STM1 of the broadband access unit BB-AE are transmitted to the switching and control unit CSCP of the broadband access unit BB-AE via the broadband bus system

5   BB-BUS of the broadband access unit BB-AE. In cases in which the switching and control unit CSCP is connected directly to the ATM-based communication network ATM-KN via an STM1 interface - compared to Figure 4 - the converted data to be transmitted can be transmitted directly to the switching and control unit CSCP from the ATM hub ATM-HUB allocated to the first communication

10   terminal KE via the ATM-based communication network ATM-KN.

In the switching and control unit CSCP, the converted data to be transmitted is switched by the cell-based switching matrix module BB-KN and transmitted via the broadband bus system BB-BUS to the STM1 access module STM1 via which the converted data to be transmitted is forwarded to the ATM

15   hub ATM-HUB allocated to the third communication terminal KE via the ATM-based communication network ATM-KN. As an alternative, the converted data to be transmitted can be transmitted directly to the relevant ATM hub ATM-HUB via the ATM-based communication network ATM-KN from the switching and control unit CSCP via the STM1 interfaces of the switching and

20   control unit CSCP.

The access unit AE of the ATM hub ATM-HUB allocated to the third communication terminal KE converts the converted data to be transmitted back into the time-division multiplex-oriented data format in accordance with the conversion method used in the ATM hub ATM-HUB allocated to the first

25   communication terminal and is forwarded to the third communication terminal KE.

A data transmission starting from the third communication terminal KE to the first communication terminal KE is effected analogously in the reverse direction.

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

5
ABSTRACT OF THE DISCLOSURE

A switching system is connected to a communication network via a broadband access unit having a network access interface and communication terminals are connected to the communication network via hubs. The broadband access unit has conversion units allocated to the hubs, via which conversion units
10 a bi-directional conversion between the data format of the packet-oriented communication network and a data format within the switching system is effected. Furthermore, the broadband access unit has a switching network module for combining the data to be transmitted from the conversion units to the associated hubs.

15 **In the claims**:

On page 16, cancel line 1, and substitute the following left-hand justified heading therefor:

I Claim as My Invention:

Please cancel claims 1-9, without prejudice, and substitute the following
20 claims therefor:

10.   A communications system, comprising:

a packet-oriented communication network;

a plurality of communication terminals connected to the packet-oriented communication network via a plurality of hubs; and

25   a switching system connected to the packet-oriented communication network via which the switching system is connected to the plurality of communication terminals, the switching system including a broadband access unit, a central unit, a plurality of conversion units and a switching matrix module, wherein the broadband access unit is connected to the central unit via a time-slot-

oriented link and is further connected to the packet-oriented communication network via at least one packet-oriented network access interface, wherein the plurality of conversion units are allocated to the plurality of hubs via which a bidirectional conversion between a data format of the packet-oriented

5   communication network and a time-slot-oriented data format is effected, and wherein the switching matrix module combines data to be transmitted to the plurality of hubs from the conversion units for transmission via the packet-oriented network access interface.

10   11.   A communications system as claimed in claim 10, wherein the broadband access unit has both a broadband bus system for transmitting a packet-oriented data stream within the access unit and a narrowband bus system for transmitting a time-slot-oriented data stream within the access unit, and wherein the broadband bus system can be coupled to the narrowband bus system via the

15   plurality of conversion units.

        12.   A communications system as claimed in claim 11, wherein the narrowband bus system is connected to a line trunk unit controller via which the broadband access unit can be connected to the central unit, which further includes

20   a switching network and a central controller, via the time-slot-oriented link.

        13.   A communications system as claimed in claim 12, wherein the line trunk unit controller is connected to the central unit via at least one time-division multiplex-oriented 4-Mbit/s data communication link.

25

        14.   A communications system as claimed in claim 13, wherein a number of time-division multiplex-oriented 4 Mbit/s communication links can be determined by a number of the plurality of conversion units arranged in the broadband access unit.

15.   A communications system as claimed in claim 11, wherein access units connected to the narrowband bus system are connected to one another via at least one time-division multiplex-oriented 2 Mbit/s communication links.

16.   A communications system as claimed in claim 11, wherein both the broadband bus system and the narrowband bus system have access locations for a plurality of access units.

17.   A communications system as claimed in claim 15, wherein at least one of the broadband access modules and the narrowband access modules can be connected to the access locations.

18.   A communications system as claimed in claim 16, wherein the access units can be respectively connected to the broadband bus system via one UTOPIA.

REMARKS

The present amendment makes editorial changes and corrects typographical errors in the specification, which includes the Abstract, in order to conform the specification to the requirements of United States Patent Practice. No new matter is added thereby. Attached hereto is a marked-up version of the changes made to the specification by the present amendment. The attached page is captioned "**Version With Markings To Show Changes Made**".
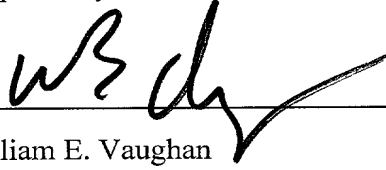
In addition, the present amendment cancels original claims 1-9 in favor of new claims 11-18. Claims 11-18 have been presented solely because the revisions by red-lining and underlining which would have been necessary in claims 1-9 in order to present those claims in accordance with preferred United States Patent Practice would have been too extensive, and thus would have been too burdensome. The present amendment is intended for clarification purposes only and not for substantial reasons related to patentability pursuant to 35 USC §§103,

102, 103 or 112. Indeed, the cancellation of claims 1-9 does not constitute an intent on the part of the Applicant to surrender any of the subject matter of claims 1-9.

5   Early consideration on the merits is respectfully requested.

Respectfully submitted,

_____ (Reg. No. 39,056)

William E. Vaughan
10   Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, Illinois 60690-1135
(312) 807-4292
Attorneys for Applicant

-18-

In The Specification:

The Specification of the present application, including the Abstract, has been amended as follows:

S P E C I F I C A T I O N

TITLE

COMMUNICATIONS SYSTEM WITH COMMUNICATION TERMINALS WHICH ARE CONNECTED TO A SWITCHING SYSTEM VIA A PACKET-ORIENTED COMMUNICATION NETWORK

BACKGROUND OF THE INVENTION

5   **Field of the Invention**

~~Communications system with communication terminals which are connected to a communications system via a packet-oriented communication network.~~

~~The invention relates to a communications system according to the~~

10   ~~preamble of Claim 1.~~

The present invention relates, generally, to a communications system with communication terminals connected to a switching system via a packet-oriented communication network and, more particularly, to a communications system wherein a switching system is connected to a communication network via a

15   broadband access unit which has a network access interface, and communication terminals are connected to the communication network via hubs.

Both from German Laid-Open Specification DE 196 04 244 A1, and from Schlichthärle D.: "Hybrid ATM/ISDN Subscriber Connection to a Broadband ISPBX", Internal Conference on Computer Communication - Proceedings of the

20   Conference - Towards a New World in Computer Communication, 28 September 1992, XP000671919, a communications system is known in which the communication terminals allocated to a switching system are connected to the switching system via an ATM-based communication network. In this

arrangement, subscriber interfaces for connecting communication terminals are provided by a ~~plurality~~ number of ATM transfer units - frequently ~~briefly~~ called ATM ~~hub~~ hubs ~~in the literature~~ - which are connected to the ATM-based connection network. The switching system and the ATM hub in each case have an

5   ATM access unit via which, on the one hand, a connection to the ATM-based communication network is implemented and, on the other hand, a bi-directional conversion between the internal data format of the switching system or hub and the data format of the ATM-based communication network is effected.

Modern ATM hubs usually have 64 subscriber interfaces for connecting

10   communication terminals to an ATM-based communication network. In particular, ISDN (Integrated Services Digital Network) communication terminals are connected ~~by means of~~ via S_0 interfaces, or digital communication terminals are connected ~~by means of~~ via interfaces derived therefrom such as, for example, U_{P0} interfaces, via an ATM hub to an ATM-based communication network. In

15   general, a U_{P0} or an S_0 interface ~~comprises~~ includes, on the one hand, two user data channels which, as ISDN-oriented B channels have a transmission rate of in each case 64 kBit/s and, on the other hand, a signalling channel which, as ISDN-oriented D channel, has a transmission rate of 16 kBit/s.

The switching system and the ATM hubs are frequently connected to an

20   ATM-based communication network ~~by means of~~ via a so-called STM1 (Synchronous Transfer Mode) interface having a maximum transmission bit rate of 155 Mbit/s. An access module providing such an STM1 interface is used in communications systems from the company Siemens AG under the internal name ~~"~~"STMA access module~~"~~". In the text which follows, this name is used for such

25   access modules having an STM1 interface.

An STMA access module arranged in the switching system currently provides the capability to support 32 subscriber interfaces of an ATM hub connected to an ATM-based communication network~~,~~; i.e., it is possible to carry out data transmission between the STMA access module and 32 different

communication terminals connected to an ATM hub. This only corresponds to a maximum transmission bit rate of 8 Mbit/s via the STM1 interface provided by the STMA access module (~~with~~ having a maximum transmission bit rate of 155 Mbit/s).

5   Thus, two STMA access modules are necessary in the switching system for supporting all 64 subscriber interfaces of an ATM hub, which is connected via an ATM-based communication network, with the switching system. Since both the STMA access modules and the ATM access unit of an ATM hub only have one STM1 interface in each case, it is necessary to interpose an additional ATM

10   switching module. The ATM switching module concentrates the data to be transmitted between the switching system and the ATM hub from the two STMA access modules onto the ATM access unit of the ATM hub or, respectively, splits these data from the ATM access unit onto the two STMA access modules.

15   Using an enhanced STMA access module which supports a total of 64 subscriber interfaces there is no need to interpose an additional switching module since an STMA access module expanded in this manner supports all 64 subscriber interfaces of an ATM hub and, thus, these can ~~thus~~ be connected directly to the enhanced STMA access module. Thus, although only one STM1 interface,

20   provided by an enhanced STMA access module, of the switching system is now occupied for each ATM hub connected to the ATM-based communication network, still only a maximum transmission bit rate of 16 Mbit/s is achieved via the STM1 interface (which has a maximum transmission bit rate of 155 Mbit/s).

It is ~~the~~ an object of the present invention, therefore to specify an

25   arrangement by ~~means of~~ which, when a number of ATM hubs are connected to a packet-oriented communication network, a data transmission can take place between a switching system and the ATM hubs via a network access of the switching system utilizing the transmission bandwidth provided by the network access.

SUMMARY OF THE INVENTION

In connection with the present invention, and to ~~To~~ provide a better

5   understanding of the basic configuration of a switching system, ~~it appears to be necessary~~ is helpful first to discuss again in greater detail principles which are already known.

In this connection, Figure 1, which shows a diagrammatic representation of the essential functional units of a switching system PBX, serves to obtain a

10   quicker understanding of the relationships. The switching system PBX has a central controller CC which can be connected to access modules and a switching network SN. The access modules ~~comprise~~ include, in particular, subscriber line modules SLM11...~~-~~SLM1x, SLM21...~~-~~SLM2x, SLMn1...~~-~~SLMnx and so-called trunk modules TM11, TM21, TMn1.

15   The subscriber line modules SLM have subscriber interfaces for connecting communication terminals KE to the switching system PBX. First, for example, ISDN communication terminals can be connected via S_0 interfaces or digital communication terminals can be connected via interfaces derived therefrom, such as, for example, U_{p0} interfaces, to the switching system PBX.

20   Furthermore, it is possible to connect analogue communication terminals and facsimile terminals to the switching system PBX via analogue a/b interfaces.

The trunk modules TM11, TM21, TMn1 are used for connecting the switching system PBX to communication networks or for connecting to other switching systems. A connection to another switching system is carried out, for

25   example, via so-called ~~"~~PCM Highways~~"~~ (Pulse Code Modulation), frequently also called primary multiplex access or S_{2M} interface in the literature, which generally ~~comprise~~ include, on the one hand, 30 user data channels which are designed as ISDN-oriented B channels with a transmission rate of 64 kBit/s and, on the other hand, a signalling channel which is designed as ISDN-oriented D

channel with a transmission rate of 64 kBit/s. A data transmission via such a ‑"PCM highway‑" thus results in a maximum transmission bit rate of 2 Mbit/s. A known trunk module TM11, TM21, TMn1 for connecting a switching system PBX to an ATM-based communication network, is, e.g., the ‑"STMA access

5   module‑" by the Siemens company mentioned in the introduction to the description.

A number of peripheral modules - subscriber line modules SLM11...SLM1x, SLM21...‑SLM2x, SLMn1...‑SLMnx and trunk modules TM11, TM21, TMn1 can be functionally combined to form a line trunk unit

10   LTU1,...‑,LTUn. Each line trunk unit LTU1,...‑LTUn is associated with a line trunk unit controller LTUC1,...‑,LTUCn which are in each case connected to the switching network SN and the central controller CC via a so-called LTU link having a transmission bandwidth of 4 x 4 Mbit/s. The message exchange between the peripheral modules and the central controller CC takes place via a signalling

15   channel which is called by the reference symbol HDLC (High Level Data Link Control) in the figure Figure 1, in the known HDLC point-to-multipoint method.

The line trunk units LTU1,...‑,LTUn are also associated with a so-called signalling unit SU. This signalling unit SU supplies communication terminals KE connected to the switching system PBX with audible tones and possibly with

20   announcements stored in the signalling unit SU.

The central controller CC handles, among other things, the switching-related processing occurring with a communication link between communication terminals KE such as, e.g., the setting-up and clearing-down of the communication link. The central controller CC essentially comprises includes

25   a central processor DP, a processor for controlling the signalling DCL, a clock generator PCG and a database DB.

An essential advantage of the arrangement system according to the present invention then consists in that a broadband access unit according to the invention for connecting the switching system to the packet-oriented communication

network can be implemented in a simple manner in switching systems already existing, instead of a conventional line trunk unit, without having to make any changes in the central controller of the switching system.

5   ~~Advantageous further developments of the invention are specified in the subclaims.~~

An advantage of <u>further</u> embodiments of the <u>present</u> invention ~~defined in the subclaims~~ consists in, among other things, that due to the modular configuration of the broadband access unit, which can be equipped both with broadband access modules and with narrowband access modules, the broadband

10   access unit can be adapted in a simple manner to the current demand for broadband or narrowband subscriber accesses or network accesses.

Thus, the broadband access unit can be operated as <u>a</u> separate broadband switching system if it is exclusively equipped with broadband access modules and both as <u>a</u> broadband switching system and, in co-operation with the other

15   components of the switching system, as <u>a</u> narrowband switching system if it is additionally equipped with narrowband access modules.

<u>Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Preferred Embodiments and the Drawings.</u>

20   ~~In the text which follows, an exemplary embodiment of the invention will be explained in greater detail with reference to the drawings, in which:~~

DESCRIPTION OF THE DRAWINGS

<u>Figure 1 shows a diagram of the functional units of a known switching system;</u>

25   Figure 2 shows a structural diagram for the diagrammatic representation of communication terminals connected to a switching system via a packet-oriented communication network;

-24-

Figure 3 shows a structural diagram for the diagrammatic representation of the essential functional units of a broadband access unit arranged in the switching system; and

Figure 4 shows a structural diagram for the diagrammatic representation of

5   the essential functional units of a switching and control unit of the broadband access unit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 2 shows a diagrammatic representation of a switching system PBX with a broadband access unit BB-AE arranged instead of a conventional line trunk

10   unit in the switching system PBX. The broadband access unit BB-AE is connected via at least one ~~also a number of~~ LTU (Line Trunk Unit) links LTU-VL with a central unit ZE, containing a switching network SN and a central controller CC, of the switching system PBX. A data transmission between the broadband access unit BB-AE and a central unit ZE via the LTU link LTU-VL is

15   effected in accordance with a time-division multiplex-oriented data format and a data transmission with a maximum transmission bit rate of 4 x 4 = 16 Mbit/s is possible via an LTU link LTU-VL.

In addition, other line trunk units LTU1,...-,LTUn-1, designed as described in connection with Figure 1, are arranged in the switching system PBX,

20   the line trunk units LTU1,...-, LTUn-1 being connected to the central unit ZE of the switching system PBX via, in each case, one LTU link LTU-VL. The line trunk units LTU1,...-, LTUn-1 connect communication terminals to the switching system PBX via subscriber interfaces or, respectively, implement a connection to a communication network or to another switching system. For example,

25   communication terminals KE are connected to the link trunk units LTU1,...-LTUn-1. The broadband access unit BB-AE is connected via a so-called STM1 (Synchronous Transfer Mode) interface, having a maximum transmission bit rate of 155 Mbit/s, to an ATM-based (Asynchronous Transfer Mode) communication network ATM-KN. Furthermore, the broadband access

-25-

unit BB-AE has other interfaces for connecting communication terminals or networks to the broadband access unit BB-AE. For example, a UTP25 interface (Unshielded Twisted Pair) having a maximum transmission bit rate of 25 Mbit/s and an Ethernet interface ES for connection to a computer network based on the

5   IP (Internet Protocol) is shown.

Furthermore, so-called ATM transfer units ATM-HUB - frequently called ~"ATM ~~hub~~ hubs~"~ in the literature - are connected to the ATM-based communication network ATM-KN. In this arrangement, the ATM hubs ATM-HUB are connected to the ATM-based communication network ATM-KN

10   in each case via an access unit AE having an STM1 interface. The ATM hubs ATM-HUB additionally have subscriber interfaces TSS1, ...-, TSS64 for connecting communication terminals to the ATM-oriented communication network ATM-KN. As an example, communication terminals KE1,...-, KEn are shown which are connected to the ATM hubs ATM-HUB via the subscriber

15   interfaces TSS1, ...-, TSS64. In particular, ISDN (Integrated Services Digital Network) communication terminals are connected ~~by means of~~ via S_0 interfaces, or digital communication terminals are connected via interfaces derived therefrom, such as, for example, U_{p0} interfaces, via the ATM hubs to the ATM-based communication network ATM-KN. In addition, there is the

20   possibility of connecting analogue communication terminals to the ATM-oriented communication network ATM-KN via analogue a/b interfaces.   Data transmission between communication terminals KE1, ...-, KEn and the switching system PBX is usually carried out on the basis of the time-division multiplex-oriented data format. For transmitting data between the communication

25   terminals KE1, ..., KEn and the switching system PBX via the ATM-based communication network ATM-KN, a bi-directional conversion is performed between the time-division multiplex-oriented data format and the data format of the ATM-oriented communication network ATM-KN by the access units AE of the ATM hubs ATM-HUB and the broadband access unit BB-AE.

Figure 3 shows a diagrammatic representation of the essential functional units of the broadband access unit BB-AE. The broadband access unit BB-AE has both a broadband bus system BB-BUS and a narrowband bus system NB-BUS for transmitting data within the access unit. In the broadband access unit BB-AE, a

5 line trunk unit controller LTUCX is arranged which is connected both to the narrowband bus system NB-BUS and, via at least one LTU link LTU-VL, to the central unit ZE of the switching system PBX. The line trunk unit controller LTUCX performs a bi-directional conversion between the data format of the LTU link LTU-VL, an LTU link LTU-VL ~~comprising~~ including four time-division

10 multiplex-oriented 4-Mbit/s communication links, and the data format of the narrowband bus system NB-BUS which ~~is composed of~~ includes a ~~plurality~~ number of time-division multiplex-oriented 2-Mbit/s communication links.

To convert the time-division multiplex-oriented data format in the access units - corresponding to the data format set up for data transmission via the

15 narrowband bus system NB-BUS - to the data format of the ATM-based communication network ATM-KN, the broadband access unit BB-AE has conversion units STMAX. The conversion units STMAX are connected, on the one hand, via the narrowband bus system NB-BUS, in each case via eight time-division multiplex-oriented 2-Mbit/s data communication links, to the line

20 trunk unit controller LTUCX and, on the other hand, via a UTOPIA (Universal Test and Operation PHY Interface for ATM) interface to the broadband bus system BB-BUS.

A bi-directional data transfer between the link trunk unit controller LTUCX and a conversion unit STMAX is possible with a maximum transmission

25 bit rate of 16 Mbit/s via the eight time-division multiplex-oriented 2-Mbit/s communication links. With the present time-division multiplex-oriented data format, this corresponds to a number of 256 multiplex channels as a result of which a total of 64 subscriber interfaces can be supported by a conversion unit STMAX.

The broadband bus system BB-BUS is connected to broadband access modules for connecting communication terminals, or computers, or for connecting the switching system PBX to a communication or computer network. As an example, an STM1 access module is shown via which, for example, the switching system PBX is connected to the ATM-based communication network ATM-KN. Furthermore, a UTP25 access module having a maximum transmission bit rate of 25 Mbit/s for connecting computers and an Ethernet interface ES for connecting the switching system PBX to a computer network based on the Internet protocol is shown. As an alternative, narrowband access modules can also can be connected to the narrowband bus system NB-BUS instead of the broadband access modules STM1, UTP25, ES.

The access modules STM1, UTP25, ES are connected to a switching and control unit CSCP (Cell Switched Central Processor) via the broadband bus system BB-BUS and a CPU (Central Processing Unit) bus system CPU-BUS. Overall, a total of eight modules (ES, STM1, UTP25, CSCP, LTUCX, STMAX) can be connected to the broadband bus system BB-BUS and to the narrowband bus system NB-BUS of the broadband access unit BB-AE.

Figure 4 shows a diagrammatic representation of the essential functional units of the switching and control unit CSCP. For a cell-based data switching by the broadband access unit BB-AE, the switching and control unit CSCP essentially has a cell-based switching matrix module BB-KN and a control unit CPU. The switching and control unit CSCP also comprises includes 4 multiplexers MUX1, ..., MUX4 for connecting the cell-based switching matrix module BB-KN to the broadband bus system BB-BUS and other STM1 access units STM1 for connecting the switching and control unit CSCP directly to the ATM-based communication network ATM-KN or to another communication or computer network. For controlling a data transmission, the control unit CPU is connected to the cell-based switching matrix module BB-KN, to a clock generator CLK and the STM1 access units STM1 via the CPU bus system CPU-BUS. To

-28-

provide the switching and control unit CSCP with a uniform clock supply, the clock generator CLK is connected to the multiplexers MUX1,...., MUX4, the cell-based switching matrix module BB-KN and the STM1 access units STM1.

The cell-based switching matrix module BB-KN has a

5 switching-matrix-module-oriented memory unit SPE subdivided into two submemories. In the first submemory of the switching-matrix-module-oriented memory unit SPE, a switching table HTT - frequently called "Header Translation Table" in the literature - is stored. This header translation table HTT contains the necessary switching information stored in the form of a pair of values consisting

10 of a so-called input VCI (Virtual Channel Identifier) value and a so-called output VCI value for switching ATM cells, by means of via which information an ATM cell arriving at the cell-based switching matrix module BB-KN is switched. The second submemory of the switching-matrix-module-oriented memory unit SPE is used for temporarily storing the user data transmitted in a payload area of an ATM

15 cell during the switching of the ATM cell in the cell-based switching matrix module BB-KN.

Furthermore, the cell-based switching matrix module BB-KN has two high-frequency UTOPIA interfaces. The cell-based switching matrix module BB-KN is connected via the UTOPIA interfaces to, in each case, two multiplexers

20 MUX1, ..., MUX4 via in each case one 16-bit-wide cell-based UTOPIA databus DB. A bi-directional data transmission rate of 622 Mbit/s can be achieved via the 16-bit-wide cell-based UTOPIA databus DB. The multiplexers MUX1, ..., MUX4, which are designed, for example, as described in the German Patent application having the official reference 197 515 60.6, convert the data format of

25 the 16-bit-wide cell-based UTOPIA databus DB to the data format of the 8-bit-wide broadband bus system BB-BUS. The multiplexers MUX1, ..., MUX4 can be connected in each case to a maximum of four 8-bit-wide databuses via which a maximum bidirectional data transmission rate of 310 Mbit/s can be achieved in each case.

-29-

The multiplexers MUX1, ..., MUX4 are, thus, connected to broadband access modules STM1, UTP25, ES or to conversion units STMAX either via the broadband bus system BB-BUS or directly to the STM1 access units (shown, for example, for the multiplexer MUX4 in ~~the figure~~ Figure 4) arranged in the switching and control unit CSCP via an 8-bit-wide UTOPIA databus.

In the text which follows, ~~it is intended to explain~~ explanation is provided for the interaction of the functional units essential to data transmission between two communication terminals in greater detail with reference to Figures 1 and 2~~:~~.

For data transmission starting from a first communication terminal KE connected to the ATM-based communication network ATM-KN via a subscriber interface TSS1, ..., TSS64 of an ATM hub ATM-HUB, to a second communication terminal KE connected via a subscriber interface of a line trunk unit LTU1, ..., LTUn-1 of the switching system PBX, the time-division multiplex-oriented data format usually provided for a data transmission between the first communication terminal KE and the second communication terminal KE is converted to the data format of the ATM-based communication network ATM-KN in the access unit AE of the ATM hub ATM-HUB associated with the first communication terminal KE. In this process, a bi-directional conversion between the time-division multiplex-oriented data format and the data format of the ATM-based communication network ATM-KN can be effected, for example, in accordance with the two conversion methods proposed in the German Patent application having the file reference 198 436 25.4.

The converted data transmitted via the ATM-based communication network ATM-KN and received by the STM1 access module STM1 of the broadband access unit BB-AE, via which the switching system PBX has been connected to the ATM-based communication network ATM-KN, are transmitted to a conversion unit STMAX allocated to the ATM hub ATM-HUB via the broadband bus system BB-BUS of the broadband access unit BB-AE. The conversion unit STMAX converts the received converted data back into the

-30-

time-division multiplex-oriented data format in accordance with the conversion method used in the access unit AE of the ATM hub ATM-HUB allocated to the first communication terminal KE. The data to be transmitted ~~are~~ is then transmitted via the narrowband bus system NB-BUS to the line trunk unit

5   controller LTUCX which adapts the data to be transmitted for a transmission via the line trunk unit link LTU-VL (within the access unit, the data ~~are~~ is transmitted via time-division multiplex-oriented 2-Mbit/s communication links; data ~~are~~ is transmitted via the LTU link LTU-VL via time-division multiplex-oriented 4-Mbit/s communication links), and then forwards ~~them~~ it to the central unit ZE

10   of the switching system PBX via the LTU link LTU-VL. In the central unit ZE, the data to be transmitted ~~are~~ is switched to the line trunk unit LTU1, ...~~,~~ LTUn-1 allocated to the second communication terminal KE by the switching network SN of the switching system PBX, which line trunk unit forwards the data to the second communication terminal KE.

15   A data transmission starting from the second communication terminal KE to the first communication terminal KE analogously takes place in the reverse direction.

For a data transmission starting from the first communication terminal KE to a third communication terminal KE also connected to the ATM-based

20   communication network ATM-KN via a subscriber interface TSS1, ..., TSS64 of an ATM hub ATM-HUB, the time-division multiplex-oriented data format usually provided for a data transmission between the first communication terminal KE and the third communication terminal KE is converted to the data format of the ATM-based communication network ATM-KN in the access unit AE of the

25   ATM hub ATM-HUB allocated to the first communication terminal KE.

The converted data transmitted via the ATM-based communication network ATM-KN and received by the STM1 access module STM1 of the broadband access unit BB-AE are transmitted to the switching and control unit CSCP of the broadband access unit BB-AE via the broadband bus system

-31-

BB-BUS of the broadband access unit BB-AE. In cases in which the switching and control unit CSCP is connected directly to the ATM-based communication network ATM-KN via an STM1 interface - compared to Figure 4 - the converted data to be transmitted can be transmitted directly to the switching and control unit

5   CSCP from the ATM hub ATM-HUB allocated to the first communication terminal KE via the ATM-based communication network ATM-KN.

In the switching and control unit CSCP, the converted data to be transmitted ~~are~~ is switched by the cell-based switching matrix module BB-KN and transmitted via the broadband bus system BB-BUS to the STM1 access module

10   STM1 ~~by means of~~ via which the converted data to be transmitted ~~are~~ is forwarded to the ATM hub ATM-HUB allocated to the third communication terminal KE via the ATM-based communication network ATM-KN. As an alternative, the converted data to be transmitted can be transmitted directly to the relevant ATM hub ATM-HUB via the ATM-based communication network

15   ATM-KN from the switching and control unit CSCP via the STM1 interfaces of the switching and control unit CSCP.

The access unit AE of the ATM hub ATM-HUB allocated to the third communication terminal KE converts the converted data to be transmitted back into the time-division multiplex-oriented data format in accordance with the

20   conversion method used in the ATM hub ATM-HUB allocated to the first communication terminal and ~~are~~ is forwarded to the third communication terminal KE.

A data transmission starting from the third communication terminal KE to the first communication terminal KE is effected analogously in the reverse

25   direction.

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

-32-

Abstract

ABSTRACT OF THE DISCLOSURE

~~Communications system comprising communication terminals connected to a communications system via a packet-oriented communication network~~

5 ~~The communications~~ A switching system ~~(PBX)~~ is connected to ~~the~~ a communication network ~~(ATM-KN)~~ via a broadband access unit ~~(BB-AE)~~ ~~exhibiting~~ having a network access interface ~~(STM1)~~ and ~~the~~ communication terminals ~~(KE)~~ are connected to the communication network ~~(ATM-KN)~~ via hubs ~~(ATM-HUB)~~. The broadband access unit ~~(BB-AE)~~ has conversion units

10 ~~(STMAX)~~ allocated to the hubs ~~(ATM-HUB)~~, ~~by means of~~ via which conversion units a bi-directional conversion between the data format of the packet-oriented communication network ~~(ATM-KN)~~ and a data format within the switching system is effected. Furthermore, the broadband access unit ~~(BB-AE)~~ has a switching network module ~~(BB-KN)~~ for combining the data to be transmitted

15 from the conversion units ~~(STMAX)~~ to the associated hubs ~~(ATM-HUB)~~.

~~Figure 2~~

GR 98 P 2995   - 1 -

Description

  Communications system with communication terminals which are connected to a communications system via a packet-oriented communication network.

  The invention relates to a communications system according to the preamble of Claim 1.

  From German Laid-Open Specification DE 196 04 244 A1, a communications system is known in which the communication terminals allocated to a switching system are connected to the switching system via an ATM-based communication network. In this arrangement, subscriber interfaces for connecting communication terminals are provided by a plurality of ATM transfer units - frequently briefly called ATM hub in the literature - which are connected to the ATM-based connection network. The switching system and the ATM hub in each case have an ATM access unit via which, on the one hand, a connection to the ATM-based communication network is implemented and, on the other hand, a bi-directional conversion between the internal data format of the switching system or hub and the data format of the ATM-based communication network is effected.

  Modern ATM hubs usually have 64 subscriber interfaces for connecting communication terminals to an ATM-based communication network. In particular, ISDN (Integrated Services Digital Network) communication terminals are connected by means of S_0 interfaces, or digital communication terminals are connected by means of interfaces derived therefrom such as, for example, U_{P0} interfaces, via an ATM hub to an ATM-based communication network. In general, a U_{P0} or an S_0 interface comprises, on the one hand, two user data channels which, as ISDN-oriented B channels have a transmission rate of in each case

64 kBit/s and, on the other hand, a signalling channel which, as ISDN-oriented D channel, has a transmission rate of 16 kBit/s.

5 The switching system and the ATM hubs are frequently connected to an ATM-based communication network by means of a so-called STM1 (Synchronous Transfer Mode) interface having a maximum transmission bit rate of 155 Mbit/s. An access module providing such an STM1 interface is used in communications systems 10 from the company Siemens AG under the internal name 'STMA access module'. In the text which follows, this name is used for such access modules having an STM1 interface.

An STMA access module arranged in the switching 15 system currently provides the capability to support 32 subscriber interfaces of an ATM hub connected to an ATM-based communication network, i.e. it is possible to carry out data transmission between the STMA access module and 32 different communication terminals 20 connected to an ATM hub. This only corresponds to a maximum transmission bit rate of 8 Mbit/s via the STM1 interface provided by the STMA access module (with a maximum transmission bit rate of 155 Mbit/s.

Thus, two STMA access modules are necessary in 25 the switching system for supporting all 64 subscriber interfaces of an ATM hub, which is connected via an ATM-based communication network, with the switching system. Since both the STMA access modules and the ATM access unit of an ATM hub only have one STM1 interface 30 in each case, it is necessary to interpose an additional ATM switching module. The ATM switching module concentrates the data to be transmitted between the switching system and the ATM hub from the two

STMA access modules onto the ATM access unit of the ATM hub or, respectively, splits these data from the ATM access unit onto the two STMA access modules.

5   Using an enhanced STMA access module which supports a total of 64 subscriber interfaces there is no need to interpose an additional switching module since an STMA access module expanded in this manner supports all 64 subscriber interfaces of an ATM hub and these can thus be connected directly to the enhanced

10 STMA access module. Thus, although only one STM1 interface, provided by an enhanced STMA access module, of the switching system is now occupied for each ATM hub connected to the ATM-based communication network, still only a maximum transmission bit rate of 16 Mbit/s

15 is achieved via the STM1 interface (which has a maximum transmission bit rate of 155 Mbit/s).

It is the object of the present invention to specify an arrangement by means of which, when a number of ATM hubs are connected to a packet-oriented

20 communication network, a data transmission can take place between a switching system and the ATM hubs via a network access of the switching system utilizing the transmission bandwidth provided by the network access.

On the basis of the features of the preamble of

25 Claim 1, the object is achieved by its characterizing features.

To provide a better understanding of the basic configuration of a switching system, it appears to be necessary first to discuss again in greater detail

30 principles which are already known.

In this connection, Figure 1, which shows a diagrammatic representation of the essential

functional units of a switching system PBX, serves to obtain a quicker understanding of the relationships. The switching system PBX has a central controller CC which can be connected to access modules and a

5   switching network SN. The access modules comprise, in particular, subscriber line modules SLM11….SLM1x, SLM21….SLM2x, SLMn1….SLMnx and so-called trunk modules TM11, TM21, TMn1.

The subscriber line modules SLM have subscriber

10   interfaces for connecting communication terminals KE to the switching system PBX. First, for example, ISDN communication terminals can be connected via S_0 interfaces or digital communication terminals can be connected via interfaces derived therefrom, such as,

15   for example, U_{p0} interfaces, to the switching system PBX. Furthermore, it is possible to connect analogue communication terminals and facsimile terminals to the switching system PBX via analogue a/b interfaces.

The trunk modules TM11, TM21, TMn1 are used for

20   connecting the switching system PBX to communication networks or for connecting to other switching systems. A connection to another switching system is carried out, for example, via so-called 'PCM Highways' (Pulse Code Modulation), frequently also called primary

25   multiplex access or S_{2M} interface in the literature, which generally comprise, on the one hand, 30 user data channels which are designed as ISDN-oriented B channels with a transmission rate of 64 kBit/s and, on the other hand, a signalling channel which is designed as

30   ISDN-oriented D channel with a transmission rate of 64 kBit/s. A data transmission via such a 'PCM highway' thus results in a maximum transmission bit rate of 2 Mbit/s. A known trunk module TM11, TM21, TMn1 for connecting a switching system PBX to an ATM-based

35   communication network, is,

e.g., the 'STMA access module' by the Siemens company
mentioned in the introduction to the description.

A number of peripheral modules – subscriber
line modules SLM11…SLM1x, SLM21….SLM2x, SLMn1….SLMnx
and trunk modules TM11, TM21, TMn1 can be functionally
combined to form a line trunk unit LTU1,….,LTUn. Each
line trunk unit LTU1,….LTUn is associated with a line
trunk unit controller LTUC1,….,LTUCn which are in each
case connected to the switching network SN and the
central controller CC via a so-called LTU link having a
transmission bandwidth of 4 x 4 Mbit/s. The message
exchange between the peripheral modules and the central
controller CC takes place via a signalling channel
which is called by the reference symbol HDLC (High
Level Data Link Control) in the figure, in the known
HDLC point-to-multipoint method.

The line trunk units LTU1,…..,LTUn are also
associated with a so-called signalling unit SU. This
signalling unit SU supplies communication terminals KE
connected to the switching system PBX with audible
tones and possibly with announcements stored in the
signalling unit SU.

The central controller CC handles, among other
things, the switching-related processing occurring with
a communication link between communication terminals KE
such as, e.g. the setting-up and clearing-down of the
communication link. The central controller CC
essentially comprises a central processor DP, a
processor for controlling the signalling DCL, a clock
generator PCG and a database DB.

An essential advantage of the arrangement according to the invention then consists in that a broadband access unit according to the invention for connecting the switching system to the packet-oriented communication

5   network can be implemented in a simple manner in switching systems already existing, instead of a conventional line trunk unit, without having to make any changes in the central controller of the switching system.

10   Advantageous further developments of the invention are specified in the subclaims.

            An advantage of embodiments of the invention defined in the subclaims consists in, among other things, that due to the modular configuration of the

15   broadband access unit, which can be equipped both with broadband access modules and with narrowband access modules, the broadband access unit can be adapted in a simple manner to the current demand for broadband or narrowband subscriber accesses or network accesses.

20   Thus, the broadband access unit can be operated as separate broadband switching system if it is exclusively equipped with broadband access modules and both as broadband switching system and, in co-operation with the other components of the switching system, as

25   narrowband switching system if it is additionally equipped with narrowband access modules.

            In the text which follows, an exemplary embodiment of the invention will be explained in greater detail with reference to the drawings, in

30   which:

Figure 2   shows a structural diagram for the
            diagrammatic representation of communication
            terminals connected to a switching system via

35

a packet-oriented communication network;

Figure 3 shows a structural diagram for the diagrammatic representation of the essential functional units of a broadband access unit arranged in the switching system;

Figure 4 shows a structural diagram for the diagrammatic representation of the essential functional units of a switching and control unit of the broadband access unit.

Figure 2 shows a diagrammatic representation of a switching system PBX with a broadband access unit BB-AE arranged instead of a conventional line trunk unit in the switching system PBX. The broadband access unit BB-AE is connected via one - also a number of - LTU (Line Trunk Unit) links LTU-VL with a central unit ZE, containing a switching network SN and a central controller CC, of the switching system PBX. A data transmission between the broadband access unit BB-AE and a central unit ZE via the LTU link LTU-VL is effected in accordance with a time-division multiplex-oriented data format and a data transmission with a maximum transmission bit rate of 4 x 4 = 16 Mbit/s is possible via an LTU link LTU-VL.

In addition, other line trunk units LTU1,....,LTUn-1, designed as described in connection with Figure 1, are arranged in the switching system PBX, the line trunk units LTU1,...., LTUn-1 being connected to the central unit ZE of the switching system PBX via in each case one LTU link LTU-VL. The line trunk units LTU1,...., LTUn-1 connect communication terminals to the switching system PBX via subscriber interfaces or, respectively, implement a connection to a communication network or to another switching system. For example, communication terminals KE are connected to the link trunk units LTU1,....LTUn-1.

The broadband access unit BB-AE is connected via a so-called STM1 (Synchronous Transfer Mode) interface, having a maximum transmission bit rate of 155 Mbit/s, to an ATM-based (Asynchronous Transfer Mode)
5   communication network ATM-KN. Furthermore, the broadband access unit BB-AE has other interfaces for connecting communication terminals or networks to the broadband access unit BB-AE. For example, a UTP25 interface (Unshielded Twisted Pair) having a maximum
10   transmission bit rate of 25 Mbit/s and an Ethernet interface ES for connection to a computer network based on the IP (Internet Protocol) is shown.

        Furthermore, so-called ATM transfer units ATM-HUB - frequently called 'ATM hub' in the
15   literature - are connected to the ATM-based communication network ATM-KN. In this arrangement, the ATM hubs ATM-HUB are connected to the ATM-based communication network ATM-KN in each case via an access unit AE having an STM1 interface. The ATM hubs ATM-HUB
20   additionally have subscriber interfaces TSS1, ..., TSS64 for connecting communication terminals to the ATM-oriented communication network ATM-KN. As an example, communication terminals KE1,...., KEn are shown which are connected to the ATM hubs ATM-HUB via the
25   subscriber interfaces TSS1, ..., TSS64. In particular, ISDN (Integrated Services Digital Network) communication terminals are connected by means of S_0 interfaces, or digital communication terminals are connected via interfaces derived therefrom, such as,
30   for example, U_{p0} interfaces, via the ATM hubs to the ATM-based communication network ATM-KN. In addition, there is the possibility of connecting analogue communication terminals to the ATM-oriented communication network ATM-KN via analogue a/b
35   interfaces.

Data transmission between communication terminals KE1,
...., KEn and the switching system PBX is usually carried
out   on   the   basis   of   the   time-division
multiplex-oriented data format. For transmitting data
5   between the communication terminals KE1, ..., KEn and the
switching system PBX via the ATM-based communication
network   ATM-KN,   a   bi-directional   conversion   is
performed between the time-division multiplex-oriented
data format and the data format of the ATM-oriented
10   communication network ATM-KN by the access units AE of
the ATM hubs ATM-HUB and the broadband access unit
BB-AE.

Figure 3 shows a diagrammatic representation of
the essential functional units of the broadband access
15   unit BB-AE. The broadband access unit BB-AE has both a
broadband bus system BB-BUS and a narrowband bus system
NB-BUS for transmitting data within the access unit. In
the broadband access unit BB-AE, a line trunk unit
controller LTUCX is arranged which is connected both to
20   the narrowband bus system NB-BUS and, via at least one
LTU   link   LTU-VL,   to   the   central   unit   ZE   of   the
switching system PBX. The line trunk unit controller
LTUCX performs a bi-directional conversion between the
data format of the LTU link LTU-VL, an LTU link LTU-VL
25   comprising   four   time-division   multiplex-oriented
4-Mbit/s communication links, and the data format of
the narrowband bus system NB-BUS which is composed of a
plurality of time-division multiplex-oriented 2-Mbit/s
communication links.
30   To convert the time-division multiplex-oriented
data format in the access units - corresponding to the
data format set up for data transmission via the
narrowband bus system NB-BUS - to the data format of
the   ATM-based   communication   network   ATM-KN,   the
35   broadband access unit BB-AE has conversion units STMAX.
The conversion

units STMAX are connected, on the one hand, via the
narrowband bus system NB-BUS – in each case via eight
time-division multiplex-oriented 2-Mbit/s data
communication links - to the line trunk unit controller

5   LTUCX and, on the other hand, via a UTOPIA (Universal
Test and Operation PHY Interface for ATM) interface to
the broadband bus system BB-BUS.

A bi-directional data transfer between the link
trunk unit controller LTUCX and a conversion unit STMAX

10 is possible with a maximum transmission bit rate of
16 Mbit/s via the eight time-division
multiplex-oriented 2-Mbit/s communication links. With
the present time-division multiplex-oriented data
format, this corresponds to a number of 256 multiplex

15 channels as a result of which a total of 64 subscriber
interfaces can be supported by a conversion unit STMAX.

The broadband bus system BB-BUS is connected to
broadband access modules for connecting communication
terminals, computers or for connecting the switching

20 system PBX to a communication or computer network. As
an example, an STM1 access module is shown via which,
for example, the switching system PBX is connected to
the ATM-based communication network ATM-KN.
Furthermore, a UTP25 access module having a maximum

25 transmission bit rate of 25 Mbit/s for connecting
computers and an Ethernet interface ES for connecting
the switching system PBX to a computer network based on
the Internet protocol is shown. As an alternative,
narrowband access modules can also be connected to the

30 narrowband bus system NB-BUS instead of the broadband
access modules STM1, UTP25, ES.

The access modules STM1, UTP25, ES are
connected to a switching and control unit CSCP (Cell
Switched Central Processor) via the broadband bus

35 system BB-BUS and a CPU (Central Processing Unit) bus
system CPU-BUS. Overall,

a total of eight modules (ES, STM1, UTP25, CSCP, LTUCX, STMAX) can be connected to the broadband bus system BB-BUS and to the narrowband bus system NB-BUS of the broadband access unit BB-AE.

5   Figure 4 shows a diagrammatic representation of the essential functional units of the switching and control unit CSCP. For a cell-based data switching by the broadband access unit BB-AE, the switching and control unit CSCP essentially has a cell-based
10   switching matrix module BB-KN and a control unit CPU. The switching and control unit CSCP also comprises 4 multiplexers MUX1, ..., MUX4 for connecting the cell-based switching matrix module BB-KN to the broadband bus system BB-BUS and other STM1 access units
15   STM1 for connecting the switching and control unit CSCP directly to the ATM-based communication network ATM-KN or to another communication or computer network. For controlling a data transmission, the control unit CPU is connected to the cell-based switching matrix module
20   BB-KN, to a clock generator CLK and the STM1 access units STM1 via the CPU bus system CPU-BUS. To provide the switching and control unit CSCP with a uniform clock supply, the clock generator CLK is connected to the multiplexers MUX1,...., MUX4, the cell-based
25   switching matrix module BB-KN and the STM1 access units STM1.

          The cell-based switching matrix module BB-KN has a switching-matrix-module-oriented memory unit SPE subdivided into two submemories. In the first submemory
30   of the switching-matrix-module-oriented memory unit SPE, a switching table HTT – frequently called 'Header Translation Table' in the literature – is stored. This header translation table HTT contains the necessary switching information stored in the form of a pair of
35   values consisting of a so-called input VCI (Virtual Channel Identifier) value and a so-called output VCI value for switching ATM cells, by means of which information an ATM cell arriving

at the cell-based switching matrix module BB-KN is switched. The second submemory of the switching-matrix-module-oriented memory unit SPE is used for temporarily storing the user data transmitted
5   in a payload area of an ATM cell during the switching of the ATM cell in the cell-based switching matrix module BB-KN.

Furthermore, the cell-based switching matrix module BB-KN has two high-frequency UTOPIA interfaces.
10 The cell-based switching matrix module BB-KN is connected via the UTOPIA interfaces to in each case two multiplexers MUX1, …, MUX4 via in each case one 16-bit-wide cell-based UTOPIA databus DB. A bi-directional data transmission rate of 622 Mbit/s can be
15 achieved via the 16-bit-wide cell-based UTOPIA databus DB. The multiplexers MUX1, …, MUX4 – which are designed, for example, as described in the German Patent application having the official reference 197 515 60.6 – convert the data format of the
20 16-bit-wide cell-based UTOPIA databus DB to the data format of the 8-bit-wide broadband bus system BB-BUS. The multiplexers MUX1, …, MUX4 can be connected in each case to a maximum of four 8-bit-wide databuses via which a maximum bidirectional data transmission rate of
25 310 Mbit/s can be achieved in each case.

The multiplexers MUX1, …., MUX4 are thus connected to broadband access modules STM1, UTP25, ES or to conversion units STMAX either via the broadband bus system BB-BUS or directly to the STM1 access units
30 (shown, for example, for the multiplexer MUX4 in the figure) arranged in the switching and control unit CSCP via an 8-bit-wide UTOPIA databus.

In the text which follows, it is intended to explain the interaction of the functional units
35 essential to data transmission between

two communication terminals in greater detail with reference to Figures 1 and 2:

For data transmission starting from a first communication terminal KE connected to the ATM-based communication network ATM-KN via a subscriber interface TSS1, ..., TSS64 of an ATM hub ATM-HUB, to a second communication terminal KE connected via a subscriber interface of a line trunk unit LTU1, ..., LTUn-1 of the switching system PBX, the time-division multiplex-oriented data format usually provided for a data transmission between the first communication terminal KE and the second communication terminal KE is converted to the data format of the ATM-based communication network ATM-KN in the access unit AE of the ATM hub ATM-HUB associated with the first communication terminal KE. In this process, a bi-directional conversion between the time-division multiplex-oriented data format and the data format of the ATM-based communication network ATM-KN can be effected, for example, in accordance with the two conversion methods proposed in the German Patent application having the file reference 198 436 25.4.

The converted data transmitted via the ATM-based communication network ATM-KN and received by the STM1 access module STM1 of the broadband access unit BB-AE, via which the switching system PBX has been connected to the ATM-based communication network ATM-KN, are transmitted to a conversion unit STMAX allocated the ATM hub ATM-HUB via the broadband bus system BB-BUS of the broadband access unit BB-AE. The conversion unit STMAX converts the received converted data back into the time-division multiplex-oriented data format in accordance with the conversion method used in the access unit AE of the ATM hub ATM-HUB allocated to the first communication terminal KE. The data to be transmitted are then transmitted via the narrowband bus system NB-BUS to the line trunk unit controller LTUCX which adapts

the data to be transmitted for a transmission via the
line trunk unit link LTU-VL (within the access unit,
the   data   are   transmitted   via   time-division
multiplex-oriented 2-Mbit/s communication links; data

5   are   transmitted   via   the   LTU   link   LTU-VL   via
time-division multiplex-oriented 4-Mbit/s communication
links), and then forwards them to the central unit ZE
of the switching system PBX via the LTU link LTU-VL. In
the central unit ZE, the data to be transmitted are

10   switched   to   the   line   trunk   unit   LTU1, ...,   LTUn-1
allocated to the second communication terminal KE by
the switching network SN of the switching system PBX,
which line trunk unit forwards the data to the second
communication terminal KE.

15   A data transmission starting from the second
communication terminal KE to the first communication
terminal KE analogously takes place in the reverse
direction.
         For a data transmission starting from the first

20   communication   terminal   KE   to   a   third   communication
terminal   KE   also   connected   to   the   ATM-based
communication network ATM-KN via a subscriber interface
TSS1, ..., TSS64 of an ATM hub ATM-HUB, the time-division
multiplex-oriented data format usually provided for a

25   data   transmission   between   the   first   communication
terminal KE and the third communication terminal KE is
converted   to   the   data   format   of   the   ATM-based
communication network ATM-KN in the access unit AE of
the   ATM   hub   ATM-HUB   allocated   to   the   first

30   communication terminal KE.
         The   converted   data   transmitted   via   the
ATM-based communication network ATM-KN and received by
the STM1 access module STM1 of the broadband access
unit BB-AE are transmitted to the switching and control

35   unit CSCP of the broadband access unit BB-AE via the
broadband bus system BB-BUS of the broadband access
unit BB-AE. In cases in

which the switching and control unit CSCP is connected directly to the ATM-based communication network ATM-KN via an STM1 interface - compared to Figure 4 - the converted data to be transmitted can be transmitted

5   directly to the switching and control unit CSCP from the ATM hub ATM-HUB allocated to the first communication terminal KE via the ATM-based communication network ATM-KN.

      In the switching and control unit CSCP, the

10   converted data to be transmitted are switched by the cell-based switching matrix module BB-KN and transmitted via the broadband bus system BB-BUS to the STM1 access module STM1 by means of which the converted data to be transmitted are forwarded to the ATM hub

15   ATM-HUB allocated to the third communication terminal KE via the ATM-based communication network ATM-KN. As an alternative, the converted data to be transmitted can be transmitted directly to the relevant ATM hub ATM-HUB via the ATM-based communication network ATM-KN

20   from the switching and control unit CSCP via the STM1 interfaces of the switching and control unit CSCP.

      The access unit AE of the ATM hub ATM-HUB allocated to the third communication terminal KE converts the converted data to be transmitted back into

25   the time-division multiplex-oriented data format in accordance with the conversion method used in the ATM hub ATM-HUB allocated to the first communication terminal and are forwarded to the third communication terminal KE.

30   A data transmission starting from the third communication terminal KE to the first communication terminal KE is effected analogously in the reverse direction.

Patent Claims

1.   A   communications   system   comprising
communication terminals (KE) which are connected to a
5   communications   system   (PBX)   via   a   packet-oriented
communication network (ATM-KN) and which are connected
to the packet-oriented communication network (ATM-KN)
with interposition of hubs (ATM-HUB),
characterized in that the communications system (PBX)
10 has a broadband access unit (BB-AE) which is connected
to a central unit (ZE) of the communications system
(PBX) via a time-slot-oriented link (LTU-VL) and to the
packet-oriented communication network (ATM-KN) via at
least   one   packet-oriented   network   access   interface
15 (STM1),
that the broadband access unit (BB-AE) has conversion
units (STMAX) allocated to the hubs (ATM-HUB), by means
of which a bi-directional conversion between the data
format of the packet-oriented communication network
20 (ATM-KN)   and   a   time-slot-oriented   data   format   is
effected, and
that the broadband access unit (BB-AE) has a switching
matrix module (BB-KN) for combining the data to be
transmitted to the associated hubs (ATM-HUB) from the
25 conversion   units   (STMAX)   for   transmission   via   the
packet-oriented network access interface (STM1).
2.   The   arrangement   as   claimed   in   claim   1,
characterized in that the broadband access unit (BB-AE)
has a broadband bus system (BB-BUS) for transmitting a
30 packet-oriented data stream within the access unit and
a narrowband bus system (NB-BUS) for transmitting a
time-slot-oriented data stream within the access unit,
and that the broadband bus system (BB-BUS) and the
narrowband bus system (NB-BUS) can be coupled to one
35 another   by   the   conversion   units   (STMAX).

3.   The arrangement as claimed in claim 2,
characterized in that the narrowband bus system
(NB-BUS) is connected to a line trunk unit controller
(LTUCX) via which the broadband access unit (BB-AE) can
be connected to the central unit (ZE), exhibiting a
switching network (SN) and a central controller (CC),
of the switching system (PBX) via the
time-slot-oriented link (LTU-VL).

4.   The arrangement as claimed in claim 3,
characterized in that the line trunk unit controller
(LTUCX) is connected to the central unit (ZE) via at
least one time-division multiplex-oriented 4-Mbit/s
data communication link.

5.   The arrangement as claimed in claim 4,
characterized in that the number of time-division
multiplex-oriented 4-Mbit/s communication links can be
determined by the number of the conversion units
(STMAX) arranged in the broadband access unit (BB-AE).

6.   The arrangement as claimed in one of claims 2
to 5, characterized in that access units (STMAX, LTUCX,
SLM; TM) connected to the narrowband bus system
(NB-BUS) are connected to one another via one or a
plurality of time-division multiplex-oriented 2-Mbit/s
communication links.

7.   The arrangement as claimed in one of claims 2
to 6, characterized in that the broadband bus system
(BB-BUS) and the narrowband bus system (NB-BUS) in each
case have access locations for a number of access units
(STMAX, LTUCX, CSCP, UTP25, STM1, ES).

8.   The arrangement as claimed in claim 6, characterized in that broadband access modules (STM1, UTP25, ES) and/or narrowband access modules (SLM, TM) can be connected to the access locations.

5   9.   The arrangement as claimed in claim 7 or 8, characterized in that the access units (CSCP, STMAX, STM1, UTP25, ES) can be connected to the broadband bus system (BB-BUS) via in each case one UTOPIA (Universal Test and Operation PHY Interface for ATM) interface.

GR 98 P 2995

Abstract

Communications   system   comprising   communication
terminals connected to a communications system via a
packet-oriented communication network

        The communications system (PBX) is connected to
the   communication   network   (ATM-KN)   via   a   broadband
access   unit   (BB-AE)   exhibiting   a   network   access
interface (STM1) and the communication terminals (KE)
are connected to the communication network (ATM-KN) via
hubs (ATM-HUB). The broadband access unit (BB-AE) has
conversion   units   (STMAX)   allocated   to   the   hubs
(ATM-HUB), by means of which conversion units a bi-
directional conversion between the data format of the
packet-oriented communication network (ATM-KN) and a
data format within the switching system is effected.
Furthermore, the broadband access unit (BB-AE) has a
switching network module (BB-KN) for combining the data
to be transmitted from the conversion units (STMAX) to
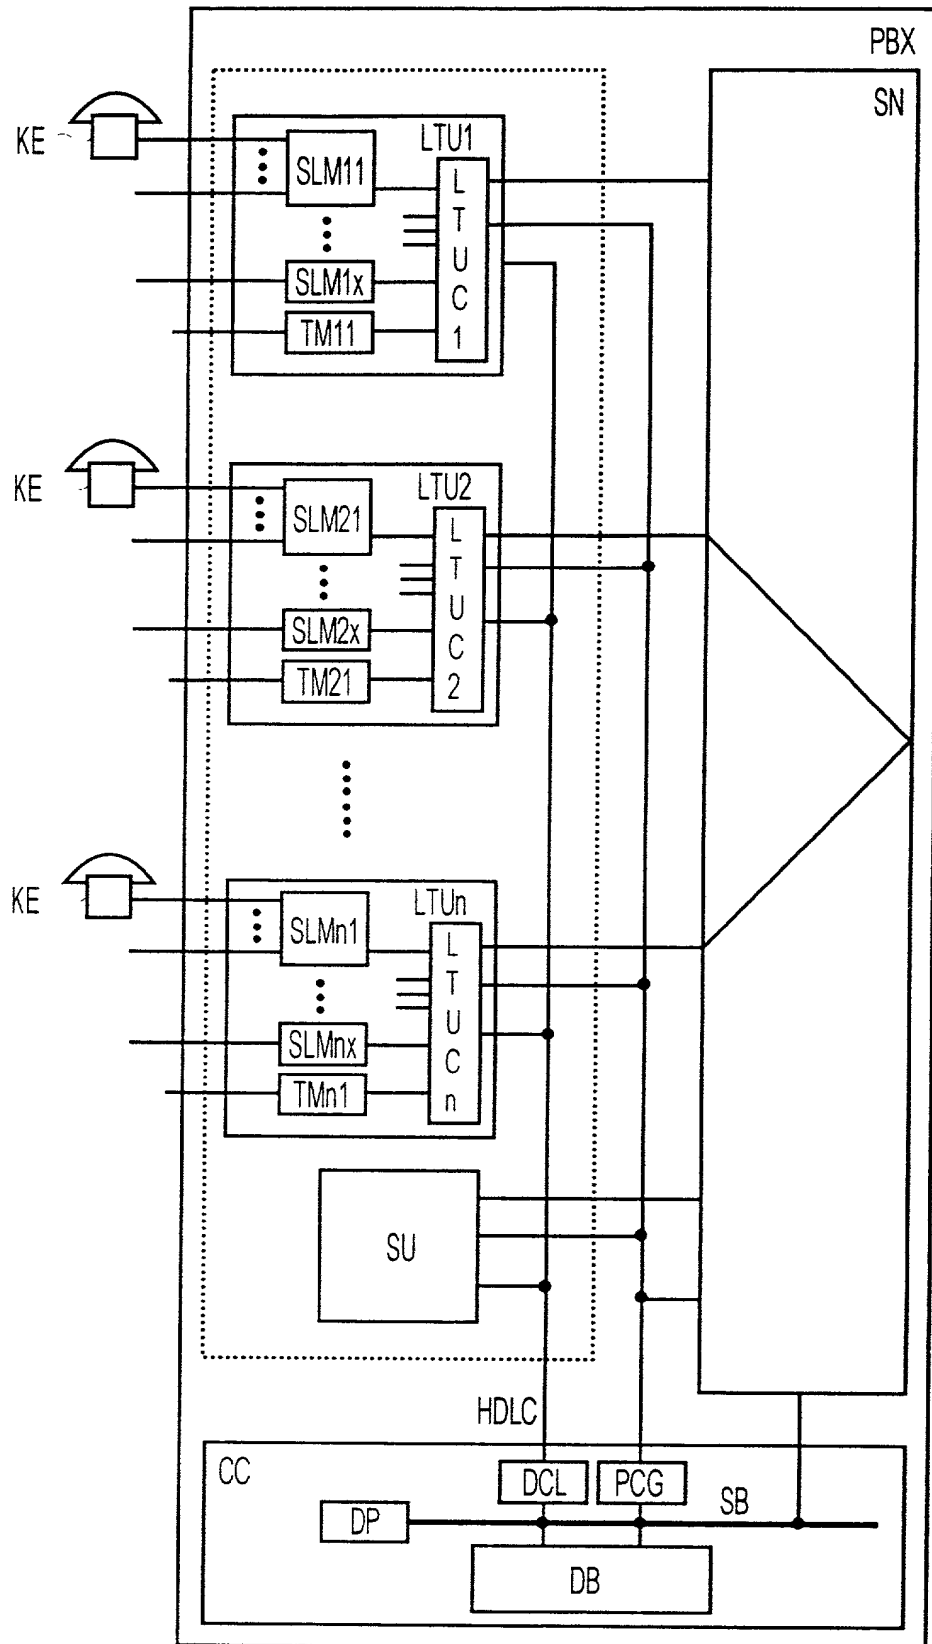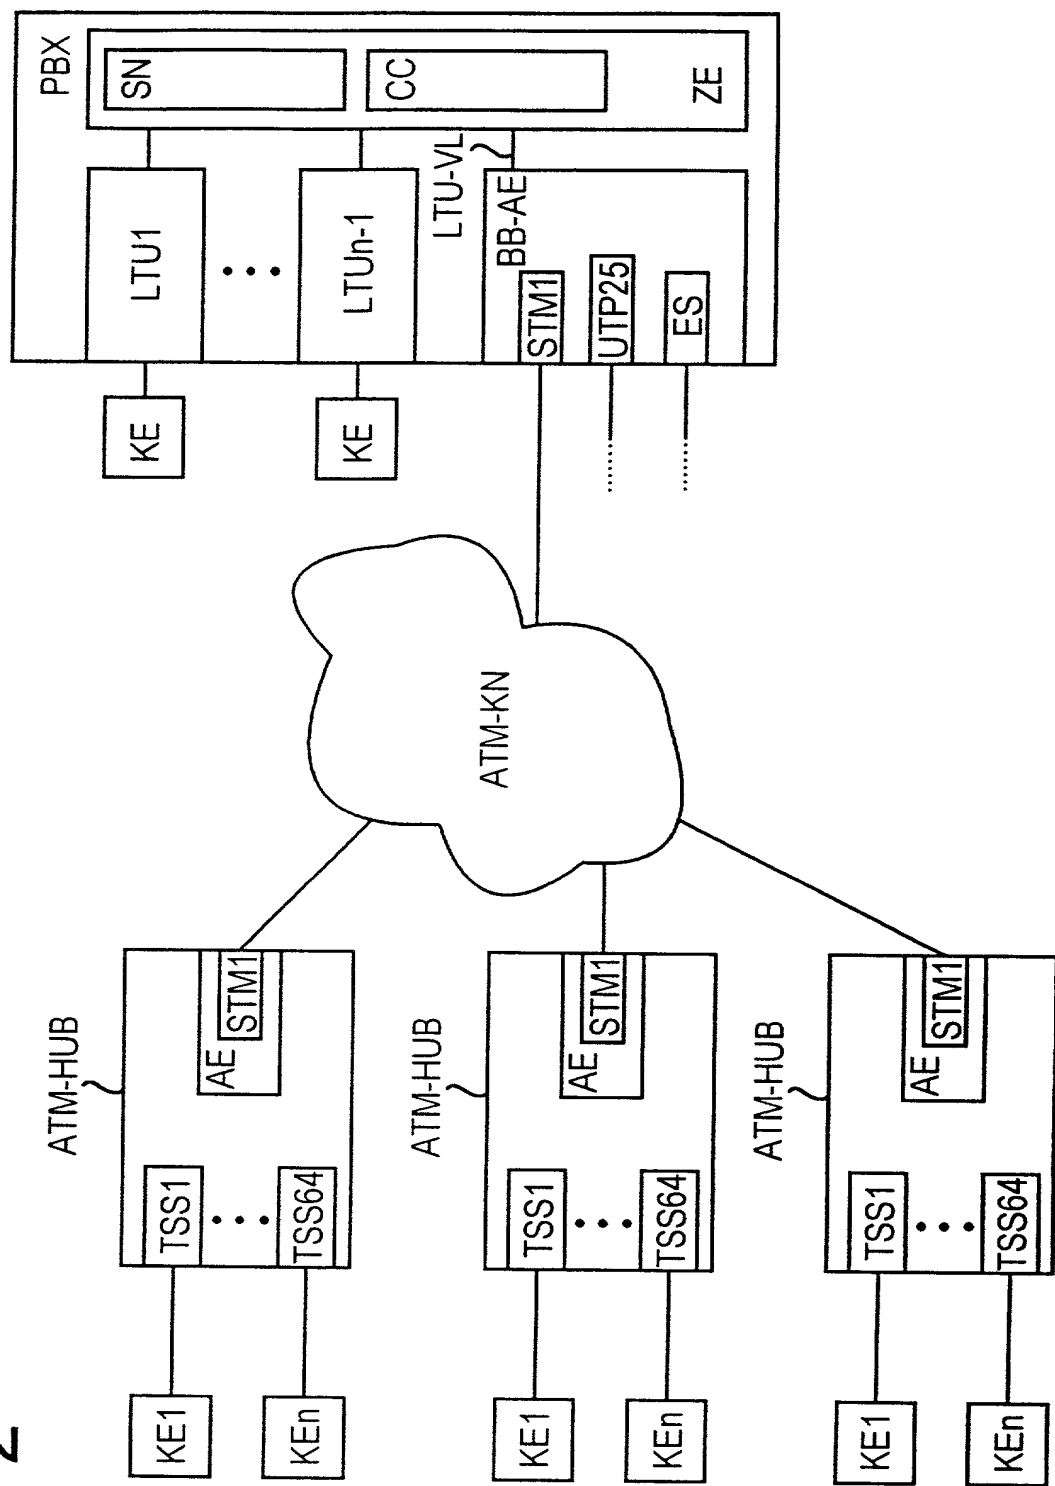the associated hubs (ATM-HUB).

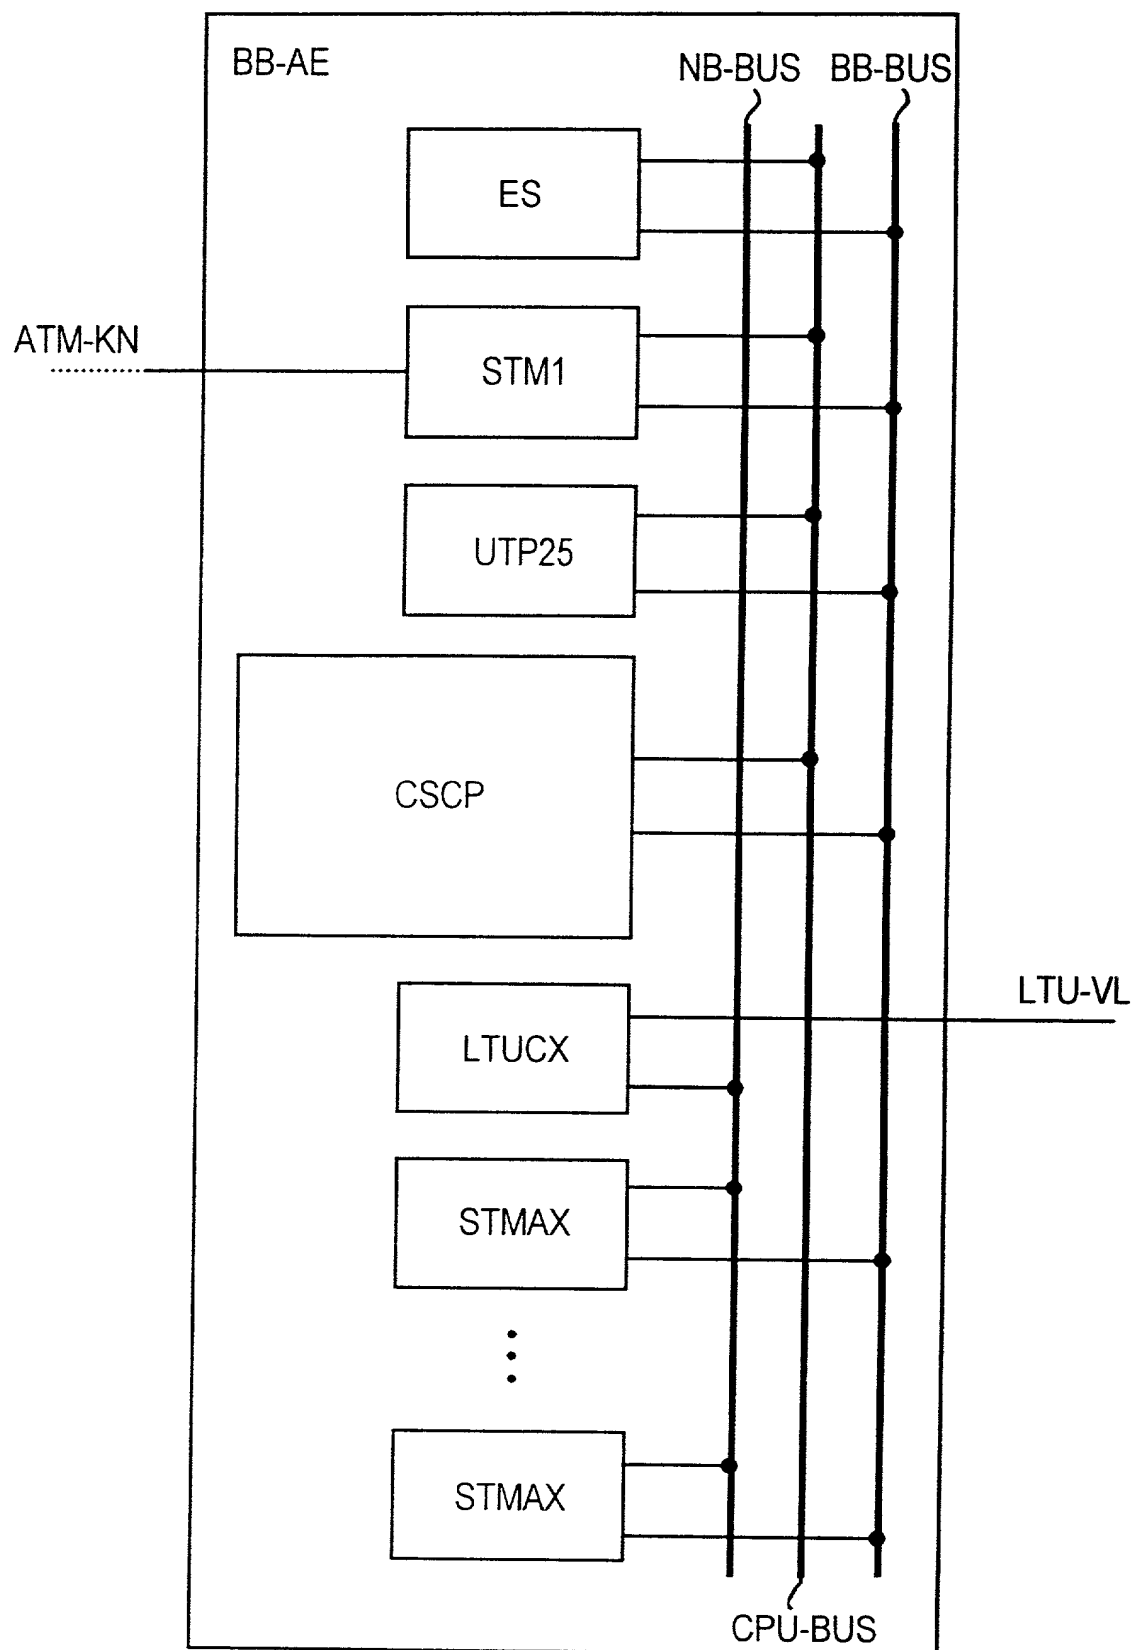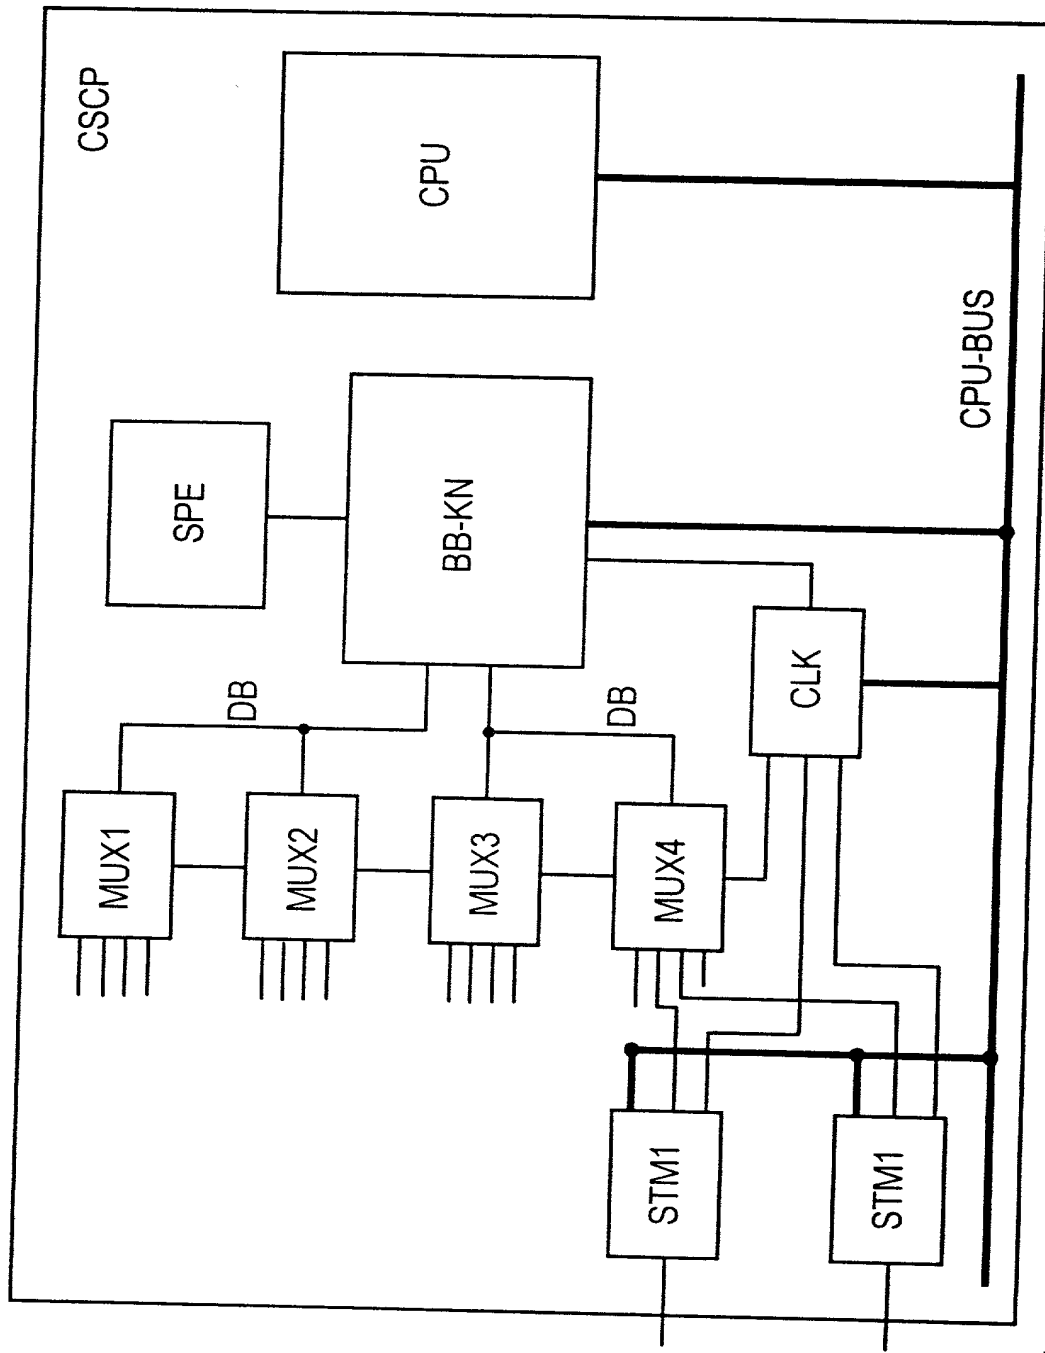Figure 2

Fig 1

Fig 2

Fig 3

Fig 4

Declaration and Power of Attorney For Patent Application
Erklärung Für Patentanmeldungen Mit Vollmacht
German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:	As a below named inventor, I hereby declare that:
dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,	My residence, post office address and citizenship are as stated below next to my name,
dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:	I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Kommunikationssystem, mit über ein paket-orientiertes Kommunikationsnetz mit einer Kommunikationsanlage in Verbindung stehenden Kommunikationsendgeräten

Communication system with communication terminal devices that are connected to a communications installation via a packet-oriented communication network

deren Beschreibung	the specification of which
(zutreffendes ankreuzen) ☐ hier beigefügt ist. ☒ am __02.11.1999__ als PCT internationale Anmeldung PCT Anmeldungsnummer _____ PCT/DE99/03481 eingereicht wurde und am _____ abgeändert wurde (falls tatsächlich abgeändert).	(check one) ☐ is attached hereto. ☒ was filed on __02.11.1999__ as PCT international application PCT Application No. ____ PCT/DE99/03481 and was amended on _____ (if applicable)
Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.	I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.
Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.	I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).
Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.	I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

IDNR: 2590 / V: 99-1.00 / B:Val

Page 1

German Language Declaration

Prior foreign appplications
Priorität beansprucht

<u>Priority Claimed</u>

<u>19850641.4</u>   <u>DE</u>   <u>03.11.1998</u>   ☒   ☐
(Number)   (Country)   (Day Month Year Filed)   Yes   No
(Nummer)   (Land)   (Tag Monat Jahr eingereicht)   Ja   Nein

                                                                                        ☐   ☐
(Number)   (Country)   (Day Month Year Filed)   Yes   No
(Nummer)   (Land)   (Tag Monat Jahr eingereicht)   Ja   Nein

                                                                                        ☐   ☐
(Number)   (Country)   (Day Month Year Filed)   Yes   No
(Nummer)   (Land)   (Tag Monat Jahr eingereicht)   Ja   Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35. United States Code. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occured between the filing date of the prior application and the national or PCT international filing date of this application.

<u>PCT/DE99/03481</u>   <u>02.11.1999</u>
(Application Serial No.)   (Filing Date D, M, Y)   _____   _____
(Anmeldeseriennummer)   (Anmeldedatum T, M, J)   (Status)   (Status)
                                                                  (patentiert, anhangig, (patented, pending,
                                                                  aufgegeben)   abandoned)

_____   _____
(Application Serial No.)   (Filing Date D,M,Y)   _____   _____
(Anmeldeseriennummer)   (Anmeldedatum T, M; J)   (Status)   (Status)
                                                                  (patentiert, anhängig, (patented, pending,
                                                                  aufgeben)   abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Form PTO-FB-240 (8-83)   Patent and Trademark Office-U.S. DEPARTMENT OF COMMERCE

German Language Declaration

<table>
<tr>
<td>

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: *(Name und Registrationsnummer anführen)*

</td>
<td>

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

And I hereby appoint

</td>
</tr>
</table>

Customer No.

Telefongespräche bitte richten an: *(Name und Telefonnummer)*	Direct Telephone Calls to: *(name and telephone number)*
	Ext. _____

Postanschrift:

Send Correspondence to:

Bell, Boyd & Lloyd LLC
70 West Madison Street, Suite 3300 60602-4207 Chicago, Illinois
Telephone: +1 312 372 1121 and Facsimile +1 312 372 2098
or
Customer No.

Voller Name des einzigen oder ursprünglichen Erfinders:	Full name of sole or first inventor:
JOSEF WAHLER	JOSEF WAHLER
Unterschrift des Erfinders Datum	Inventor's signature Date
30.3.01	
Wohnsitz	Residence
TAUFKIRCHEN, DEUTSCHLAND DE	TAUFKIRCHEN, GERMANY
Staatsangehörigkeit	Citizenship
DE	DE
Postanschrift	Post Office Address
DORFSTR.33/K	DORFSTR.33/K
82024 TAUFKIRCHEN	82024 TAUFKIRCHEN
Voller Name des zweiten Miterfinders (falls zutreffend):	Full name of second joint inventor, if any:
Unterschrift des Erfinders Datum	Second Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).	*(Supply similar information and signature for third and subsequent joint inventors).*

Form PTO-FB-240 (8-83)   Patent and Trademark Office-U.S. Department of COMMERCE